




## ► Gr8 Eye Point

Designed by forged alloy steel, quenched and tempered.  
360° rotation.  
100% magnaflux crack detection.

Test certificates supplied.

**Applications:** Lifting and lashing applications

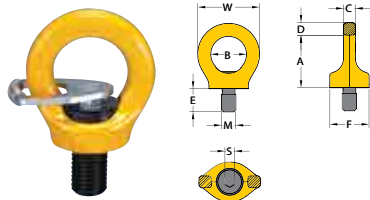

Bolt Size (mm)	WLL (tonnes)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Mass (kg)	Part No.
M12 X 1.75 X 28	0.75	42	30	10	13	18	33	0.2	47314
M16 X 2.00 X 30	1.5	51	35	14	13	24	35	0.3	47315
M24 X 3.00 X 48	3.2	70	48	19	21	36	52	0.9	47316
M30 X 3.50 X 55	4.5	86	60	24	26	45	62	1.7	47317

## ► Gr8 Weld-On Hook

For use as a spreader beam lifting attachment or for fixed anchor point. Allows for axial loading and positive locking with the safety latch.  
Welding instructions supplied with each unit.

Test certificates supplied.

**Applications:** Spreader beams and excavator bucket lifting points



WLL (tonnes)	P (mm)	L (mm)	T (mm)	H (mm)	W (mm)	A (mm)	M (mm)	Mass (kg)	Part No.	Markings	Repair kit Part No.
1.0	18	70	18	27	95	7	4	0.6	40915Y	YX1	41029Y
2.0	25	85	20	30	115	8	5	1.0	40916Y	YX2	41034Y
3.0	28	107	23	30	133	9	6	1.4	40919Y	YX3	41031Y
4.0	28	114	30	38	142	10	7	2.0	40920Y	YX4	41032Y
5.0	30	135	31	47	167	12	7	3.0	40917Y	YX5	41035Y
8.0	32	137	39	52	176	12	8	3.8	40921Y	YX6	41033Y

