

CLEVIS AND EYE RIGGING SCREWS


Product Description

- AS2319-2001
- 6:1 Safety Factor
- Grades L, P & S
- Fully Tested and Certified to AS2319
- Galvanized
- Manufactured using only heat certified Australian Steel (AS1442/AS1444)



Available on Request


- Lock Nuts

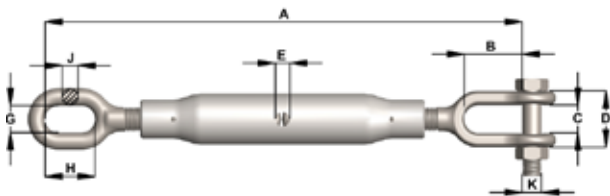

Townley Drop Forge is both NATA Accredited (Test Lab No. 13554) and AS/NZS ISO9001 Certified (Certificate number FS 604897)..

Dimensions and Working Load Limits (WLL) Metric - Grades L, P & S

Nominal Size	A Closed	A Open	B	C	D	E	F	G	H	J	K	Grade L WLL	Grade P WLL	Grade S WLL
M10	260	385	30	14	30	8.5	180	11	21	7	10	0.3t	0.6t	0.8t
M12	335	525	36	15	35	8.5	230	14	30	9	10	0.5t	1t	1.2t
M16	355	535	45	20	40	9.0	230	17	36	12	12	0.75t	1.6t	2t
M20	385	550	55	22	46	10.5	230	21	42	14	16	1.25t	2.5t	3.2t
M24	555	735	59	30	58	13.0	360	25	51	17	20	2.5t	4t	5t
M33	644	920	80	38	75	14.0	380	33	70	24	27	5t	8t	10t
M48	730	1000	109	46	110	18.0	420	44	91	38	42	N/A	16t	20t

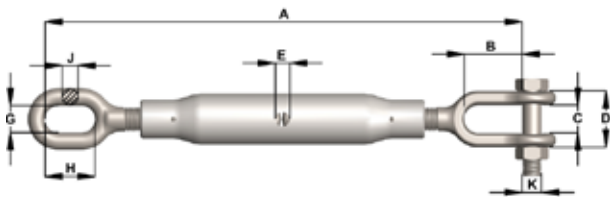

Dimensions and Working Load Limits (WLL) BSW – Grade L

Nominal Size	A Closed	A Open	B	C	E	F	G	H	J	K	Grade L WLL
1 1/4"	603	876	63	38	14	380	35	65	22	25	5t
1 1/2"	673	952	82	48	16	405	38	75	25	32	6t
1 3/4"	705	959	93	50	17	405	41	88	32	35	7.5t
2"	743	978	99	50	19	405	44	102	38	41	10t
2 1/4"	813	1029	115	60	22	405	60	130	41	47	15t
2 1/2"	826	1029	115	70	22	405	60	130	47	51	20t

Subject to technical modifications