




Lever Block / Come Along (L3 Series)

Austlift L-3 series lever blocks are used for general hoisting in the mining, construction, industrial and domestic situations. Commonly used for short lifts and pulling applications.

- Standard height of lift 1.5 or 3M except for 250kg which has 1 metre lift. Other lift height available upon request.
- Robust, durable, portable and compact in construction.
- All lever blocks come with ball bearing swivel hook.
- Spare parts available refer to page 69.

- * Please check operation manual for more details.
- * Longer chain lengths are available upon request.

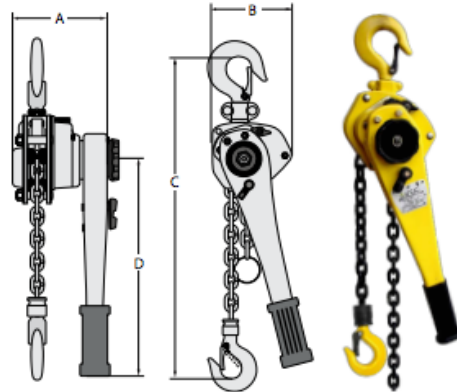

CHAIN SIZE (mm)	CODE	LIFT LENGTH (M)	WLL (T)	TEST LOAD (T)	EFFECTS REQUIRED AT CAPACITY (N)	NT. (kg)	DIMENSION (mm)			
							HEAD ROOM		HOOK TO HOOK C min.	HANDLE D
							A	B		
4	121002	1	0.25	0.38	217	1.85	92	75	205	153
5	121005	1.5	0.5	0.75	303	3.5	110	82	260	251
	121305	3								
6	121010	1.5	0.8	1.2	140	7.0	152	128	295	256
	121310	3								
6	121015	1.5	1	1.5	185	7.2	152	128	295	256
	121315	3								
7.1	121020	1.5	1.6	2.4	234	11	175	148	335	368
	121320	3								
	121620	6								
10	121025	1.5	3.2	4.8	363	20	195	181	450	368
	121325	3								
	121625	6								
10	121030	1.5	6.3	9.45	370	28	195	232	542	368
	121330	3								
10	121035	1.5	9	13.5	375	43	366	195	645	368
	121335	3								

CHAIN SIZE (mm)	CODE	LIFT LENGTH (M)	WLL (T)	TEST LOAD (T)	EFFECTS REQUIRED AT CAPACITY (N)	NT. (kg)	DIMENSION (mm)			
							HEAD ROOM		HOOK TO HOOK C min.	HANDLE D
							A	B		
6	121107	1.5	0.8	1.12	140	7.0	152	128	295	256
6	121111	1.5	1	1.5	185	7.2	152	128	295	256
7.1	121115	1.5	1.6	2.4	234	11	175	148	335	368
10	121130	1.5	3.2	4.8	363	20	195	181	450	368
10	121160	1.5	6.3	9.45	370	28	195	232	542	368
10	121190	1.5	9	13.5	375	43	366	195	645	368

Specially Designed with Overload Protection

Refer to Page 71 for lever block spare parts information.

Webbing Snatch Block

Austlift Webbing Snatch Blocks are specially designed for webbing assembly.

CODE	WLL (kg)	SHEAVE DIA (mm)	WEB DIA. (mm)	UNIT WEIGHT (kg)
139275	750	60	50-56	2.565



AS/NZS 2089

