


» Gr8 Clevis Locking Shortening Clutch

Lockable clutch allows the shortening of a chain sling without loss of WLL. Enhanced security due to the locking mechanism that can be closed single-handedly to prevent the chain from disengaging.

Test certificates supplied.

Note: Always ensure the loaded chain passes out of the bottom of the Shortening Clutch. Not to be used as a bottom end fitting, back-hooking or reeving applications.

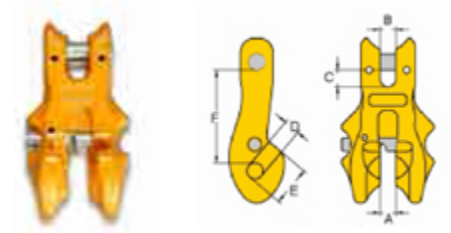

REPAIR KIT




- **Applications:** Shortening of chain slings
- **Australian Standard:** AS 3776

Chain Size (mm)	WLL (tonnes)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Mass (kg)	Part No.	Markings	Repair kit Part No.
6.0	1.1	7	7	10	7	18	50	0.3	40564Y	KCK - 6 - 8	41122Y
7.1/8.0	2.0	10	10	10	10	24	56	0.5	40565Y	KCK - 7 + 8 - 8	41123Y
10.0	3.2	12	12	12	12	28	66	0.9	40566Y	KCK - 10 - 8	41124Y
13.0	5.3	15	15	16	16	39	88	2.1	40567Y	KCK - 13 - 9	41125Y
16.0	8.0	18	21	19	19	48	103	3.7	40568Y	KCK - 16 - 10	41125Y
20.0	12.5	22	23	23	21	55	132	5.7	40569Y	KCK - 18/20 - 11	41127Y

» Gr8 Clevis Container Link

Supplied with spring gate.
Test certificates supplied.

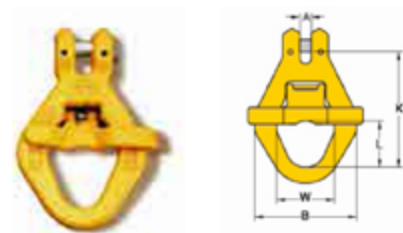

- **Applications:** Rubbish skips and recycling bins

Chain Size (mm)	WLL (tonnes)	A (mm)	K (mm)	L (mm)	W (mm)	B (mm)	Mass (kg)	Part No.	Markings
13	5.3	14	141	57	65	125	1.8	42015	KU 13 - 8