

» Gr8 Clevis 'C' Hook

A general purpose hook that can be mechanically coupled for easy assembly and use.


Test certificates supplied.

Hooks without a latch are generally used for specific applications, ie. not for lifting use. Where there is a risk of the hooks becoming detached during use, a risk assessment shall be conducted in accordance with Section 11 of AS 3776.

- **Applications:** Logging
- **Australian Standard:** AS 3776

| Chain Size (mm) | WLL (tonnes) | A (mm) | K (mm) | P (mm) | T (mm) | H (mm) | Mass (kg) | Part No. | Markings | Repair kit Part No. |
|-----------------|--------------|--------|--------|--------|--------|--------|-----------|----------|-----------|---------------------|
| 7.1/8.0 | 2.0 | 9 | 80 | 19 | 18 | 22 | 0.5 | 40395 | FE 7+8 -8 | 41123Y |
| 10.0 | 3.2 | 11 | 105 | 26 | 24 | 26 | 0.9 | 40396 | FE 10-8 | 41124Y |
| 13.0 | 5.3 | 14 | 138 | 34 | 32 | 34 | 2.1 | 40397 | FE 13-8 | 41125Y |
| 16.0 | 8.0 | 18 | 170 | 38 | 37 | 45 | 3.6 | 40398 | FE 16-8 | 41126Y |

Alloy Lifting

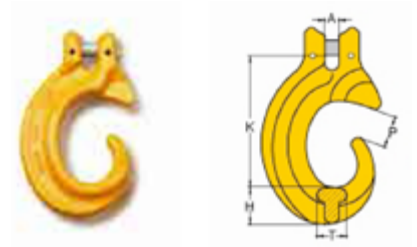

REPAIR KIT




» Gr8 Clevis Forest Hook

Designed for reeving applications with a narrow throat opening to prevent chain being accidentally dislodged in use.

Test certificates supplied.

Hooks without a latch are generally used for specific applications, therefore where there is a risk of the hooks becoming detached during use, a risk assessment shall be conducted in accordance with Section 11 of AS 3776.

- **Applications:** Reeving and logging
- **Australian Standard:** AS 3776

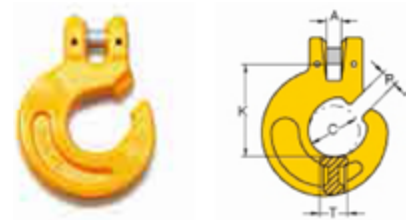

REPAIR KIT




| Chain Size (mm) | WLL (tonnes) | K (mm) | P (mm) | T (mm) | A (mm) | C (mm) | Mass (kg) | Part No. | Markings | Repair kit Part No. |
|-----------------|--------------|--------|--------|--------|--------|--------|-----------|----------|----------------|---------------------|
| 7.1/8.0 | 2.0 | 58 | 10 | 18 | 9 | 32 | 0.5 | 40389Y | YT - 7 + 8 - 8 | 41123Y |
| 10.0 | 3.2 | 82 | 12 | 21 | 13 | 45 | 0.9 | 40390Y | YT 10 - 8 | 41124Y |
| 13.0 | 5.3 | 100 | 16 | 27 | 14 | 47 | 1.7 | 40391Y | YT 13 - 8 | 41125Y |

» Gr8 Shackle Eye Swivel Hook

Test certificates supplied.

- **Applications:** Chain slings
- **Australian Standard:** AS 3776

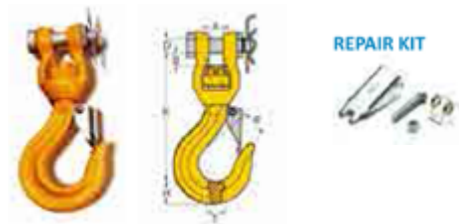

| Chain Size (mm) | WLL (tonnes) | K (mm) | P (mm) | D (mm) | A (mm) | B (mm) | T (mm) | H (mm) | Mass (kg) | Part No. | Markings | Repair kit Part No. |
|-----------------|--------------|--------|--------|--------|--------|--------|--------|--------|-----------|----------|--------------|---------------------|
| 16.0 | 8.0 | 225 | 54 | 28 | 28 | 28 | 35 | 45 | 5.9 | 42345 | YSW - 16 - 8 | 43956Y |

» Gr8 Shank Self-Lock Hook

With all the features of the traditional self-lock hook, these can be machined to suit your specific application (PWB Anchor Limited does not provide machining service).

Test certificates supplied.

** d min = the minimum shank dimension after machining.

Note: Proof testing must be conducted after machining the shank.

- **Australian Standard:** AS 3776

