

## » Gr8 Clevis Swivel Self-Lock Hook (with ball bearing)

Alloy Lifting

Designed with ball bearing allowing the hook to swivel freely under load.  
Test certificates supplied.

- **Applications:** Chain slings
- **Australian Standard:** AS 3776

Chain Size (mm)	WLL (tonnes)	A (mm)	K (mm)	P (mm)	T (mm)	H (mm)	Mass (kg)	Part No.	Markings	Repair kit Load pin Part No.	Repair kit Trigger Part No.
6.0	1.1	6	156	29	15	19	0.8	40511	YE - 6 - 8	41122Y	42040Y
7.1/8.0	2.0	9	188	34	20	24	1.3	40513	YE - 7 + 8 - 8	41123Y	40341Y
10.0	3.2	11	215	44	26	30	2.2	40515	YE - 10 - 8	41124Y	40342Y
13.0	5.3	14	275	52	30	39	4.5	40517	YE - 13 - 8	41125Y	40343Y
16.0	8.0	18	323	60	36	49	7.9	40518	YE - 16 - 8	41126Y	41433Y
20.0	12.5	21	417	90	48	62	12.5	40519	YE - 18/20 - 8	41127Y	40630Y




## » Gr8 Clevis End Link

A versatile link designed for use in a reeveable sling as top or terminal end fitting.  
Test certificates supplied.

- **Applications:** Reeveable chain slings
- **Australian Standard:** AS 3776

Chain Size (mm)	WLL (tonnes)	A (mm)	K (mm)	L (mm)	G (mm)	T (mm)	H (mm)	Mass (kg)	Part No.	Markings
7.1/8.0	2.0	9	99	80	65	15	15	0.4	40180Y	YG 7 + 8 - 8
10.0	3.2	11	125	100	80	19	18	0.8	40181Y	YG 10 - 8
13.0	5.3	14	168	136	108	25	22	1.5	40182Y	YG 13 - 8
16.0	8.0	18	198	158	124	27	26	2.7	40183Y	YG 16 - 8

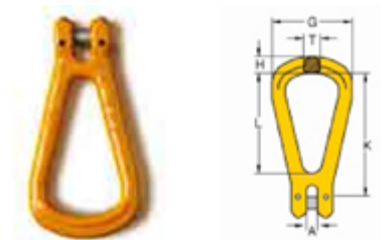

**PVB**  
**ANCHOR**