


| Chain Size 1 Leg (mm) | Chain Size 2 Leg (mm) | WLL (tonnes) | H (mm) | J (mm) | K (mm) | Mass (kg) | Part No. | Markings |
|-----------------------------|-----------------------------|-----------------|-----------|-----------|-----------|--------------|----------|-------------|
| 6.0-7.1 | - | 1.6 | 130 | 70 | 13 | 0.4 | 40617 | 7.1-40617 |
| 8.0/10.0 | 7.1/8.0 | 3.5 | 135 | 70 | 16 | 0.7 | 40618 | 10-40618-8 |
| 13.0 | 10.0 | 5.5 | 200 | 100 | 22 | 1.7 | 40619 | 13-40619-10 |
| 16.0 | 13.0 | 9.2 | 240 | 120 | 30 | 3.8 | 40620 | 16-40620-13 |
| 20.0 | 16.0 | 13.8 | 280 | 140 | 32 | 5.4 | 40621 | 20-40621-16 |
| 22.0 | 20.0 | 21.6 | 300 | 150 | 40 | 8.5 | 40622 | 22-40622-20 |
| 26.0 | 22.0 | 26.0 | 330 | 165 | 42 | 10.5 | 40623 | 26-40623-22 |
| 32.0 | 26.0 | 36.7 | 360 | 180 | 50 | 15.0 | 40624 | 32-40634-26 |
| 32.0 | 32.0 | 54.5 | 410 | 220 | 60 | 30.0 | 41767 | MA60MLGR80 |

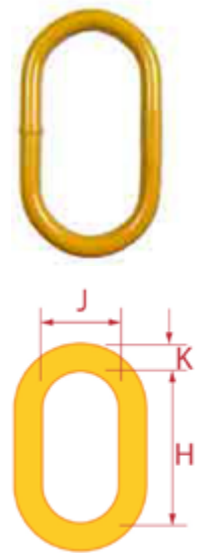

» Large Multi Oblong Link

Designed for use in 2, 3 or 4-leg assemblies.

Comprising a master link and two intermediate links, each with the same lifting capacity. The intermediate links allow for back hooking and attachment of thimbles.

Test certificates supplied.


Sizes 6-22mm manufactured in Australia.

Includes standard markings of either PWB-HA800 or PWB-HA8 for links manufactured in Australia. 26mm and 32mm manufactured in South Africa.

- **Applications:** Chain slings or wire rope slings
- **Australian Standard:** AS 3776

| Chain Size 2, 3 or 4 Leg | WLL (tonnes) | H (mm) | J (mm) | K (mm) | T (mm) | U (mm) | V (mm) | Mass (kg) | Part No. | Markings |
|-----------------------------|--------------|--------|--------|--------|--------|--------|--------|-----------|----------|-------------|
| 6.0-8.0 | 3.5 | 180 | 90 | 20 | 88 | 44 | 13 | 1.7 | 40542 | 40542-8 |
| 10.0 | 5.5 | 240 | 120 | 26 | 114 | 57 | 20 | 4.0 | 40543 | 40543-10 |
| 13.0 | 9.2 | 280 | 140 | 30 | 130 | 70 | 22 | 6.7 | 40544 | 40544-13 |
| 16.0 | 13.8 | 300 | 150 | 32 | 160 | 80 | 30 | 11.1 | 40545 | 40545-16 |
| 20.0 | 21.6 | 330 | 165 | 42 | 180 | 90 | 32 | 17.5 | 40546 | 40546-20 |
| 22.0 | 26.0 | 360 | 180 | 50 | 200 | 100 | 40 | 25.2 | 40547 | 40547-22 |
| 26.0 | 36.7 | 431 | 231 | 60 | 368 | 205 | 50 | 64.0 | 42048 | MA60QA GR80 |
| 32.0 | 54.5 | 473 | 263 | 70 | 431 | 231 | 60 | 103.0 | 42049 | MA70QA GR80 |

Alloy Lifting



» Enlarged Multi Oblong Link

Incorporating a 4:1 design factor, comprising a master link and two generous intermediate links designed to accommodate the attachment of wire rope thimbles.

Test certificates supplied.

* WLL based on 2 leg sling with one leg per intermediate link.

** WLL based on 3 or 4 leg sling with maximum two legs per intermediate link. Note: WLL values expressed in this table are based on a Design Factor of 4:1.

- **Applications:** Wire rope slings
- **Standard:** EN 1677