


» Lever Block (L3 Series)

Lever Hoists

Austlift L-3 series Lever Blocks are used for general hoisting in the mining, construction, industrial and domestic situations. Commonly used for short lifts and pulling applications.

- Rated capacities available 250kg to 9 tonnes.
- Standard height of lift 1.5 or 3 metre except for 250kg which has 1 metre lift, Other lift height available upon request.
- Robust, durable, portable and compact in construction.
- All Lever Blocks come with ball bearing Swivel Hook.
- Test Certificate and instruction manual supplied.
- Conforms to AS1418.2 standards.

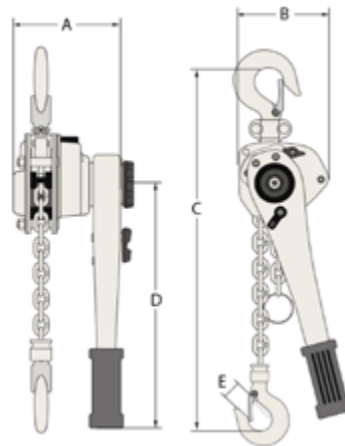

WLL	0.25T	0.5T	0.75T	1T	1.5T	3T	6T	9T
CODE	121002	121005 /121305	121010 /121310	121015 /121315	121020 /121320	121025 /121325	121030 /121330	121035 /121335
Lift Length (m)	1	1.5 / 3	1.5 / 3	1.5 / 3	1.5 / 3	1.5 / 3	1.5 / 3	1.5 / 3
Test Load (T)	0.38	0.75	1.12	1.5	2.25	4.5	9	13.5
Effects required At capacity, (N)	217	303	140	185	234	363	370	375
Lifting Chain Size (mm)	4	5	6.3	6.3	7.1	9	9x2	9x3
Min Hook to Hook: C (mm)	205	260	295	295	335	450	542	645
Head Room: B (mm)	75	82	128	128	148	181	232	366
Head RoomL: A (mm)	92	110	152	152	175	195	195	195
Handle size: D (mm)	153	251	256	256	368	368	368	368
Net weight (kg)	1.85	3.5	7.0	7.2	11	20	28	43

Please check operation manual for more details. Longer Chain Lengths are available upon request.

