

## » Gr8 Clevis 'C' Hook

A general purpose hook that can be mechanically coupled for easy assembly and use.


Test certificates supplied.

Hooks without a latch are generally used for specific applications, ie. not for lifting use. Where there is a risk of the hooks becoming detached during use, a risk assessment shall be conducted in accordance with Section 11 of AS 3776.

- **Applications:** Logging
- **Australian Standard:** AS 3776

Chain Size (mm)	WLL (tonnes)	A (mm)	K (mm)	P (mm)	T (mm)	H (mm)	Mass (kg)	Part No.	Markings	Repair kit Part No.
7.1/8.0	2.0	9	80	19	18	22	0.5	40395	FE 7+8 -8	41123Y
10.0	3.2	11	105	26	24	26	0.9	40396	FE 10-8	41124Y
13.0	5.3	14	138	34	32	34	2.1	40397	FE 13-8	41125Y
16.0	8.0	18	170	38	37	45	3.6	40398	FE 16-8	41126Y

### Alloy Lifting

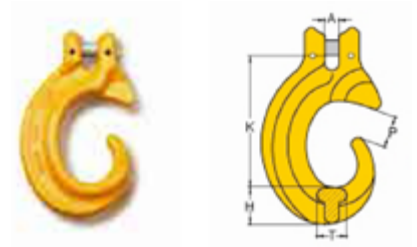

#### REPAIR KIT




## » Gr8 Clevis Forest Hook

Designed for reeving applications with a narrow throat opening to prevent chain being accidentally dislodged in use.

Test certificates supplied.

Hooks without a latch are generally used for specific applications, therefore where there is a risk of the hooks becoming detached during use, a risk assessment shall be conducted in accordance with Section 11 of AS 3776.

- **Applications:** Reeving and logging
- **Australian Standard:** AS 3776

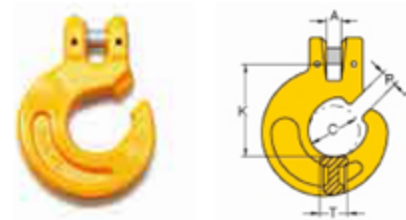

#### REPAIR KIT

