


» Gr8 Eye Sling Hook

Test certificates supplied.

Hooks without a latch are generally used for specific applications, therefore where there is a risk of the hooks becoming detached during use, a risk assessment shall be conducted in accordance with Section 11 of AS 3776.

- **Applications:** Chain slings
- **Australian Standard:** AS 3776


Chain Size (mm)	WLL (tonnes)	K (mm)	P1 (mm)	A (mm)	D (mm)	T (mm)	H (mm)	Mass (kg)	Part No.	Markings
6.0	1.1	80	23	20	9	16	20	0.3	40301Y	6 - 8 YP
7.1/8.0	2.0	98	28	25	11	20	23	0.5	40302Y	7 + 8 - 8 YP
10.0	3.2	121	36	32	14	23	31	0.9	40303Y	YP 10 - 8
13.0	5.3	152	40	40	18	28	38	1.9	40304Y	YP 13 - 8
16.0	8.0	184	44	50	22	32	47	3.2	40305Y	YP 16 - 8
20.0	12.5	218	45	60	26	43	48	5.7	40306Y	YP 18/20 - 8
22.0	15.0	244	73	50	31	50	62	9.1	40307Y	YP 22 - 8
26.0	21.2	279	77	64	35	60	80	13.6	40308Y	YP 26 - 8
32.0	31.5	352	114	88	40	65	86	18.7	40309Y	YP 32 - 8

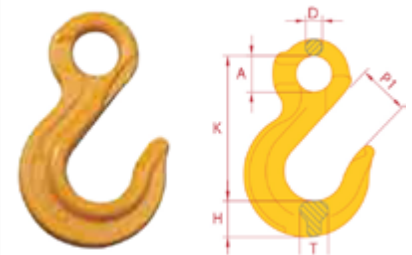

» Gr8 Eye Sling Hook with Latch

Fitted with sturdy spring loaded safety latch for added security in lifting. Test certificates supplied.

- **Applications:** Chain slings
- **Australian Standard:** AS 3776

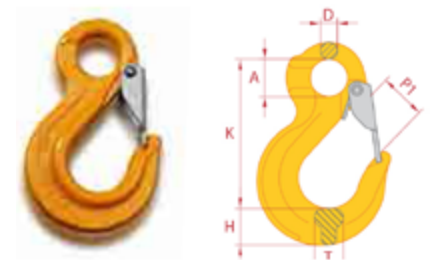

REPAIR KIT

