

» Gr8 Omega Link

Alloy Lifting

Not for use on PWB oblong links.
Test certificates supplied.

- **Applications:** Suitable as chain end fitting
- **Australian Standard:** AS 3776

Chain Size (mm)	WLL (tonnes)	K (mm)	D (mm)	P (mm)	T (mm)	Mass (kg)	Part No.	Markings	Repair kit Part No.
7.1/8.0	2.0	36	27	9	11	0.2	41322Y	YO 6 - 8	41123Y
10.0	3.2	44	32	12	15	0.4	41323Y	YO 7 + 8 - 8	41124Y
13.0	5.3	55	42	16	17	0.8	41324Y	YO 10 - 8	41125Y
16.0	8.0	69	50	18	22	1.5	41325Y	YO 13 - 8	41126Y
18,20	12.5	71	58	21	28	2.1	41326Y	YO 18/20 - 8	41127Y




» Gr8 Twist Eye Choke Hook

Sliding along the chain length the Gr8 Twist Eye Choke Hook is designed for use in reeving applications with the Gr8 Omega Link used as the end fitting.

Test certificates supplied.

- **Applications:** Reeving
- **Australian Standard:** AS 3776

Chain Size (mm)	WLL (tonnes)	K (mm)	C (mm)	A (mm)	Mass (kg)	Part No.	Markings
7.1/8.0	2.0	95	19	32	0.4	42273	7 + 8 - 8 KE
10.0	3.2	116	21	41	0.8	42274	10 - 8 KE
13.0	5.3	150	27	50	2.0	42275	13 - 8 KE
16.0	8.0	185	32	67	3.1	42276	16 - 8 KE

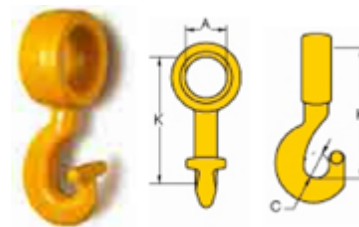

PVB
ANCHOR